

Advances at a Glance

Fast and intuitive workflow

RIOScan offers various functions to minimize work time.

- 5 second scan time (HS Mode)
- Automatic plate detection :
- Plate insertion and correct plate side is detected for image reading.
- Auto erasing
- Preview function :
- Users can check the images through the touch screen whether they are properly attained.
- QuickScan mode:
- Images can be scanned and stored in the internal memory while network connection has dropped.

Multiple access and sharing in your clinic

Users can place RIOScan at any small space in their clinics, such as chair side, worktable or x-ray room, for convenient scanning.

Ethernet connection enables users to view the images in every PC in the clinic.


Convenient image management

RIOView software provides convenient features such as image management, image measurement, multi-view and FMX (Full Mouth X-ray) mode.

Users can also adjust image filters upon their preferences including sharpness, brightness and contrast.





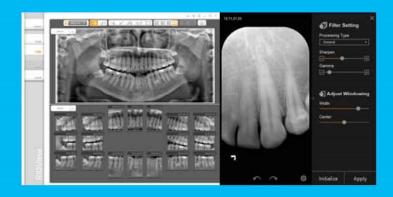







Patient comfort & Easy examination

- Flexible and soft image plates make x-ray examination painless for patients.
- Since plates are placed closer to gingiva area than intraoral sensors, image quality gets enhanced.
- Cable-free plates reduce users' difficulties.
- Users are free from positioning limits.

Advantages of Image Plate





Double protection of image plate

- Front and back protection layers reduce the risk of physical impact.
- There are no wire abrasions or connection errors that occur frequently on intraoral sensors.


High quality images for accurate diagnosis 5 different image plate sizes for all intraoral examinations



Obtained from local clinics and hospital

Enhanced Image Quality

For Chairside & Multi-share

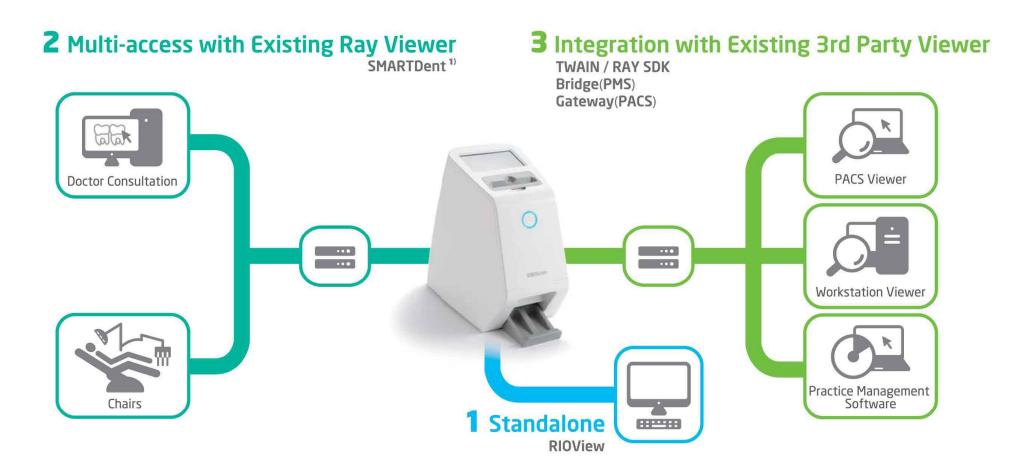

Network environment

- Support standalone and multiple network access
- Support 3rd party integration with TWAIN, RAY SDK, bridge and gateway. (contact local representative)
- DICOM 3.0 compatible

Operating environment

Operating system	Microsoft Windows 7(32bit / 64bit)	
	Microsoft Windows 8(32bit / 64bit)	
	Microsoft Windows 10(32bit / 64bit)	
Processor	Intel i5 or higher	
Screen resolution	1280 x 800 or higher	
Ethernet	100Mbps fast ethernet	

Technical Data

Components



Specifications

RIOScan(Model: RPS500)

Item	Standard package	Occlusal kit	
Image plate size	Size 0~Size 3	Size 4	
Resolution (Theoretical)	SHR 21 lp/mm HR 16 lp/mm HS 9 lp/mm		
Gray scale	14 bit		
Display	4.3" Touch screen		
Connection	Ethernet		
Dimension	170(W) x 260(H) x 278(D) mm		
Weight	Approx. 3.5 kg		
Power supply	100-240 V~, 1.5 A, 50-60 Hz, (24 VDC Adapter, 2.5 A)		

Operation Conditions

- Temperature : 10~35 °C - Humidity : 20~80 % RH

- Atmospheric pressure: 800 hPa~1060 hPa

Image Plate Sizes



22x35 mm 0.87x1.38"



24x40 mm 0.94x1.57"



31x41 mm 1.22x1.61"



27x54 mm 1.06x2.13"



57x76 mm 2.24x2.99"









Ray Digital solution

For more information or inquiries, please visit www.raymedical.com or contact your local representative.

Offre ADF 2019

Ensemble ERLM Ray medical Rioscan RPS 5000

comprenant:

Machine de développement RioScan

Logiciel d'acquisition et viewer

plaque taille 0 x2, plaque taille 2 x2, protection pour plaque taille 0 et 2 200x2, enveloppe de protection taille 0 et 2 200x2, boîte de rangement de plaques x1, tapis silicone x1.

4590€ TTC



Ray Co., Ltd. 📥

332-7, Samsung1-ro, Hwaseong-si, Gyeonggi-do, 18380, Korea Phone +82.31.605.1000

Email ray_overseas@raymedical.co.kr www.raymedical.com Web



Idem dentaire sarl

3 rue aux juifs 14000 CAEN tél 09.50.18.47.00 fax 09.55.18.47.00 contacts@idem-dentaire.fr http://www.idem-dentaire.fr